

- SUPPLIES NEEDED**
- 1/2 YARD OF 54" WIDE FABRIC
 - SHARP SCISSORS
 - REMOVABLE MARKING MEDIUM (chalk, wax, tailor's task, etc.)
 - 1 - 24" NON-SEPARATING ZIPPER
 - THREAD
 - SEWING MACHINE (optional)
 - 1/2 YARD OF THINNER POCKET FABRIC



CUTTING INSTRUCTIONS

1. Print pattern. You can print this document (fold on sheets of standard size paper and tape the pages together, or print on a wide-format printer 30" or wider). Print sheets of this series (see approximately 8.5" if available to you, the RPD recommends wide-format printing).
2. Check your pattern is printed, and check the correct size to remove any excess paper. This template should fit equally on a 54" wide or larger piece of fabric that has been folded in half. If your fabric is less than 54" wide, see **NOTE A**. For maximum width, the pattern is laid out on fabric that has not been cut. For fabric with a nap, such as velvet or corduroy or fabric with a clear directional print, see **NOTE B**.
3. Fold your fabric in half along the lengthwise grain marking wherever there is a change of edge. Schedule in the self-finished edge of fabric. This narrow border keeps the fabric from curving or fraying. Offset it by an edge that coincides with the fold along the lengthwise grain marking wherever there is a change of edge. If you cut pieces in the center, frequently differ from the main body of the fabric.
4. Place the paper template on top of your fabric, matching the folded edge of the fabric with the side of the paper marked "folded edge."
5. Place pins throughout the template pinning together both layers of fabric as well as the paper.
6. Cut around the perimeter of each piece.
7. Laying the pieces on fabric, you will now need to snip each of the notches, taking care to not snip beyond the end of the U-shape!

NOTE A: FABRIC LESS THAN 54" WIDE
If your fabric is less than 54" wide, you will need to print each pattern piece on a separate sheet of paper, and then sew the pieces together. The pieces should be printed on a 54" wide or larger piece of fabric that has been folded in half. If your fabric is less than 54" wide, you will need to print each pattern piece on a separate sheet of paper, and then sew the pieces together.

NOTE B: FABRIC WITH NAP OR DIRECTIONAL PATTERN
For fabric with a nap, such as velvet or corduroy, place the fabric with the nap or directional pattern on the pattern pieces. Make the nap or directional pattern on the pattern pieces. Make the nap or directional pattern on the pattern pieces. Make the nap or directional pattern on the pattern pieces.

NOTE C: USING FUSIBLE INTERFACING
Fusible interfacing is a material that is used to stiffen, support, or stabilize certain pieces of a garment. Make the nap or directional pattern on the pattern pieces. Make the nap or directional pattern on the pattern pieces. Make the nap or directional pattern on the pattern pieces.

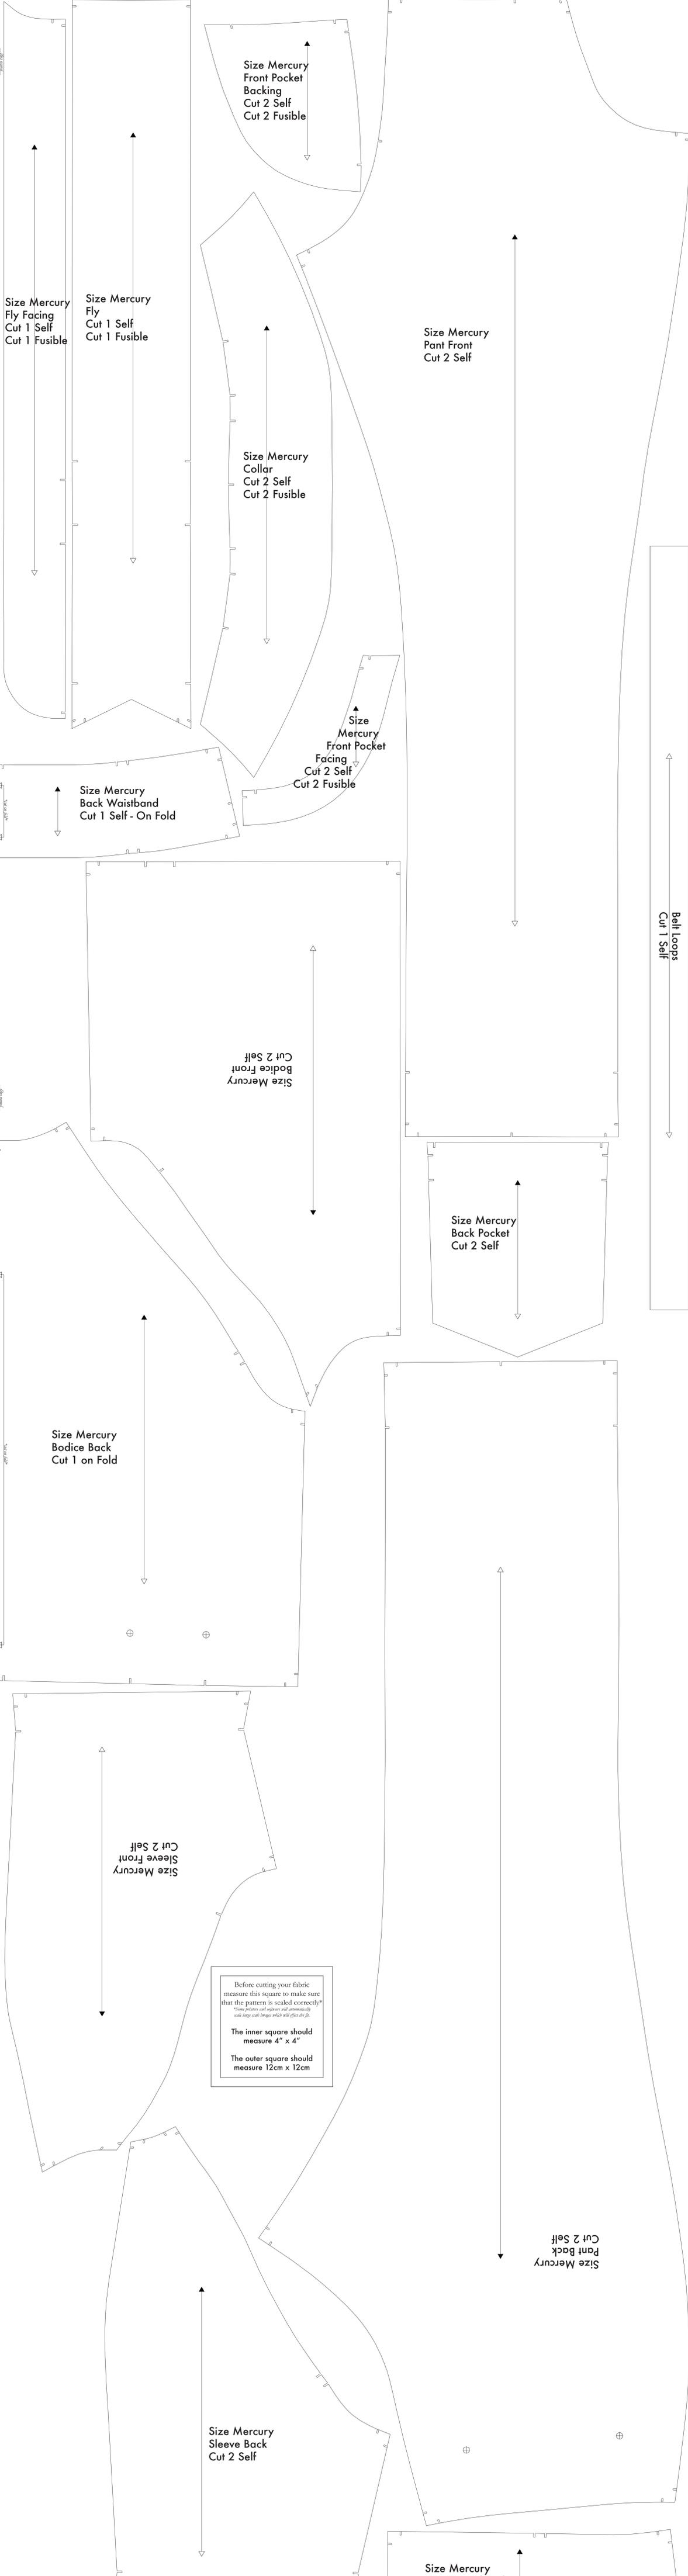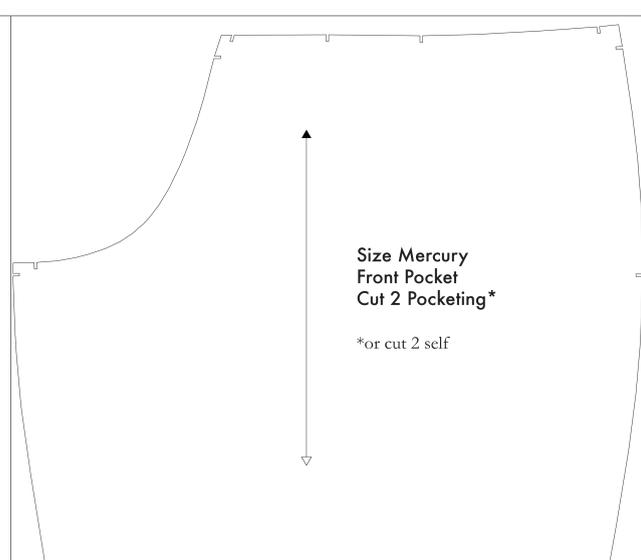

Before cutting your fabric measure this square to make sure that the pattern is scaled correctly!
*Keep printer and software well automatically with large and images which will affect the fit.

The inner square should measure 4" x 4"

The outer square should measure 12cm x 12cm